

IBARMIA.

ZVH MULTIPROCESS


60 - 58 / 55 / 50 - 48 / 45 / 40

5 AXIS MULTITASKING MOVING COLUMN MACHINING CENTERS

Combine 5 axis vertical and/or horizontal multitasking capacity with a fixed table so you can be ready for any job at the shortest notice.



Z SERIES

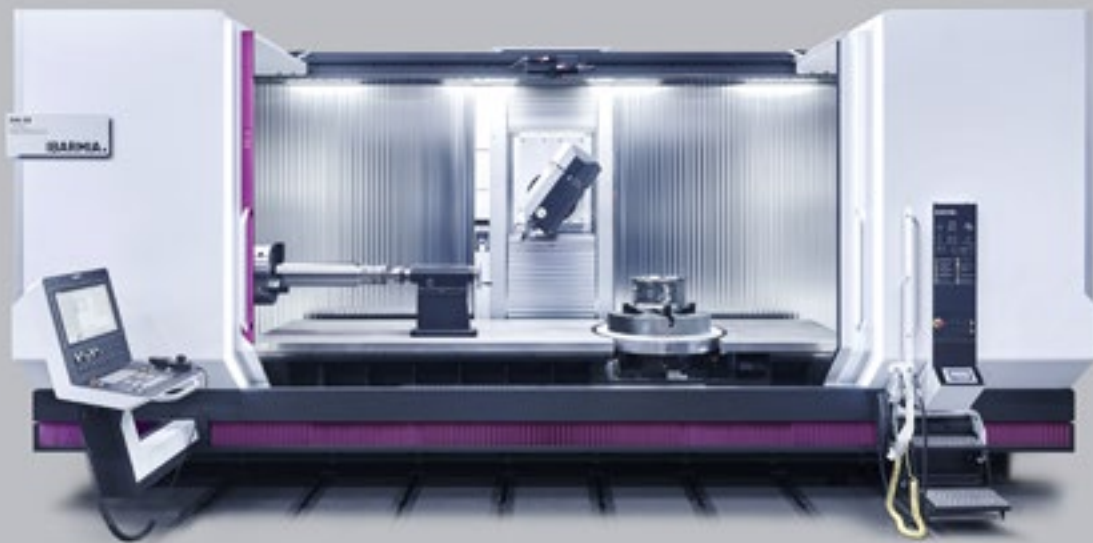

www.ibarmia.com

Z SERIES MULTITASKING CONCEPT




ZVH SPINDLE HEAD
B axis, 4th movement.
Continuous tilting head / Torque motor. +/- 105°

MOVING COLUMN DESIGN

The IBARMIA moving column platform is ideal for flexible manufacturing of a wide range of pieces thanks to its heavy load capacity fixed table provided with standard side windows for extra-long parts (ZV EXTREME). The integration of a powerful and accurate B axis head allows machining complex parts in fewer setups by using rotary tables (ZVH EXTREME). Finally, you can add turning capacity to the wide range of rotary tables available and the result will be a machine able to machining the most complex parts in only one setup (ZVH MULTIPROCESS).



MANUFACTURING TECHNOLOGY

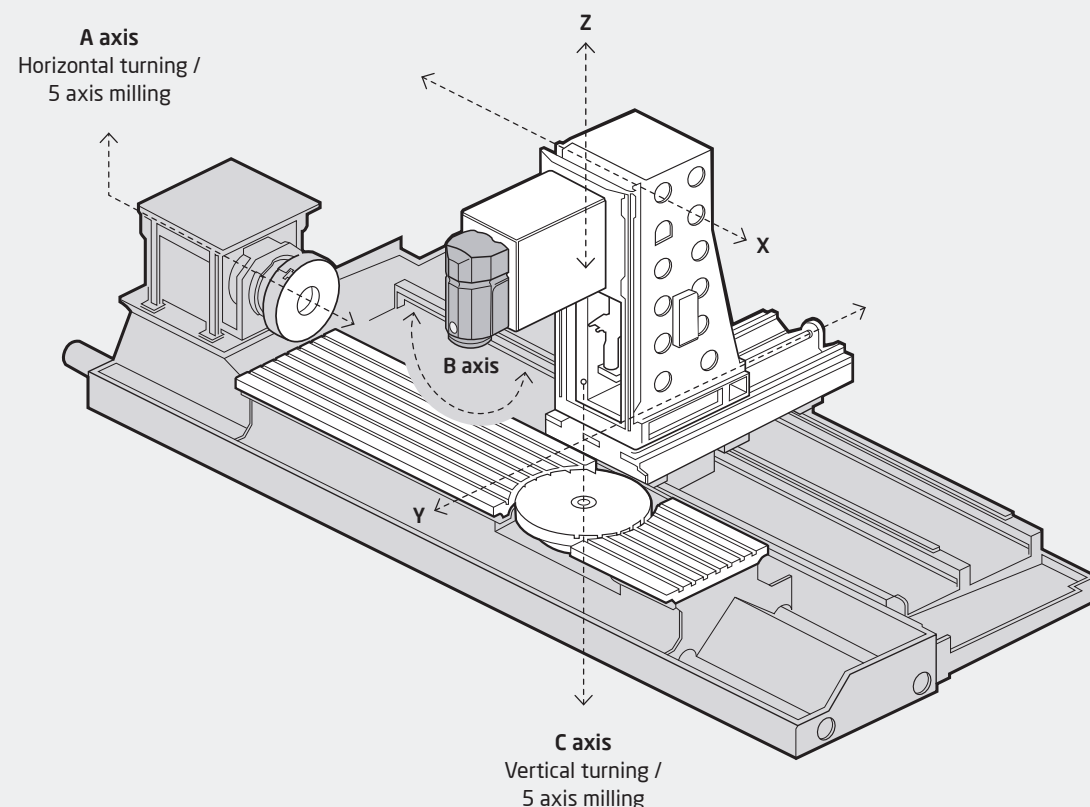

Z SERIES_ BODY SIZES FOR SK 40 & SK 50

SIZE 4_ 40 / 45 / 48 models



Y-Z travels
Y 600 / 800 / 1000 mm - Z 900 mm
Tool holder (ZVH MULTIPROCESS)
HSK A-63 • CAPTO 6

SIZE 5_ 50 / 55 / 58 models



Y-Z travels
Y 600 / 800 / 1000 mm - Z 1100 mm
Tool holder (ZVH MULTIPROCESS)
HSK A-100 • CAPTO 8

SIZE 6_ 60 model



Y-Z travels
Y 1100 mm - Z 1100 mm (Option 1300 mm)
Tool holder (ZVH MULTIPROCESS)
HSK A-100 • CAPTO 8



#40 Electrospindle
Power in S1 (100%); S6 (40%)
30 kW / 50 kW
Total available power from
2000 rpm
Torque in S1 (100%); S6 (40%)
130 Nm / 200 Nm
Maximal rotation speed
12.000 rpm

Z guideways structure

IBARMIA adapts the machine structure to each electrospindle type. By this way, in the #40 machines the column carriage travels over two guideways.



#50 Electrospindle
Power in S1 (100%); S6 (40%)
74 kW / 84 kW
Total available power from
4000 rpm
Torque in S1 (100%); S6 (40%)
300 Nm / 452 Nm
Maximal rotation speed
12.000 rpm

3 guideways structure

By the same way IBARMIA introduces a bigger three guideways structure for #50 spindles, to endure the forces applied when machining hard materials with high power.

Z SERIES_ UP TO 12.000 mm IN X AXIS



A wide range of lengths available

1600 / 2200 / 3000 / 4000 / 5000 / 6000 / 7000 /
8000 / 9000 / 10.000 / 11.000 / 12.000 mm


Z SERIES_ Y AXIS ZERO GRAVITY DESIGN



Constant cutting conditions on Y axis

Fixed distance monoblock column design: accuracy, power and rigidity on the full travel of the Y axis.

ZVH MULTIPROCESS_ MACHINE IT ALL

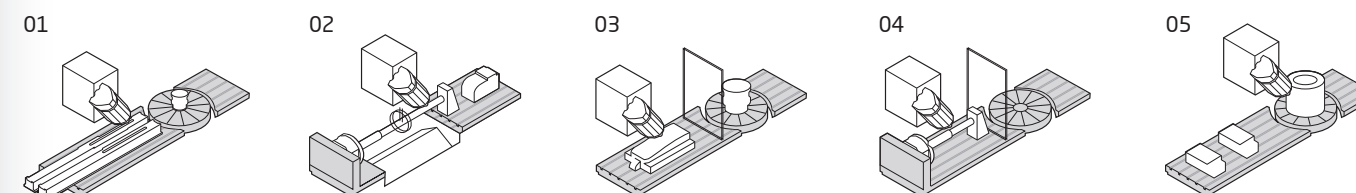

Create your own machine

The high configurability and the combination of axes and rotary tables provide an unlimited field of work which ensures an efficient return on the investment.

01_

• Thermo-symmetrical and thermostable structure design.

02_

• Maximum stability in the monoblock design of the machine bed. Structural bodies of maximum rigidity for an optimum performance throughout the machine's life cycle.

• Rectified ball screws of high precision with preloaded double nuts for the longitudinal axis movement in machines up to 6000 mm long.

• Machines from 3000 mm long are provided with ball screw supports to prevent bending and vibrations in rapid movements.

03_

• Rack and pinion system on the longitudinal axis in machines from 7000 mm long.



• Movement on X / Y / Z axis over linear guides with preloaded rolling shoes with two rows of circulating rollers.

• Standard measuring device on X, Y, Z axes in our machining centres: glass scales.

04_

• Geometric check and volumetric calibration of the machine by laser interferometer on request, according to ISO 230- 2, -4 and -6.

Z SERIES_ CONSTRUCTION FEATURES

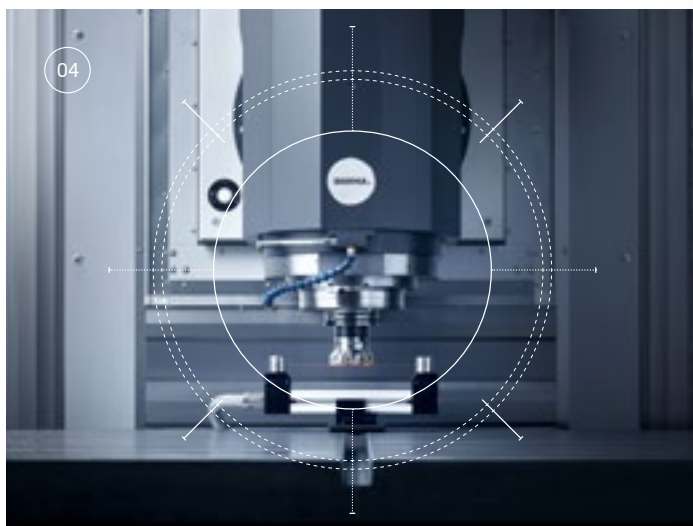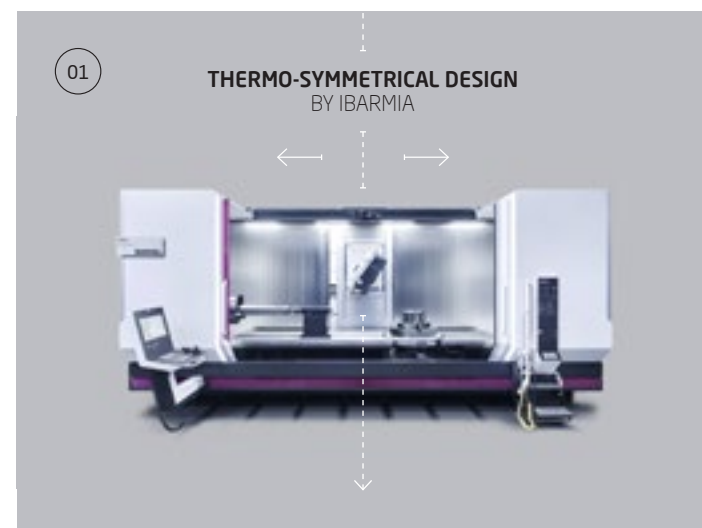

Z SERIES

Z SERIES_ STANDARD CHARACTERISTICS



Totally encapsulated working area and safety windows.



Up to 12.000 mm long working area fixed table with "T" slots.



Illuminated working area. Working area without horizontal planes and smooth top.




Standard convertible roof with an ergonomic design of doors for a wide and smooth opening, facilitating the loading/unloading of pieces by crane.



Loading of extra long pieces through the side panelling which is easily removable.



Chip conveyor with integrated coolant tank.



Double auger system for chip evacuation (long tail chip conveyor in ZVH-ZV 40 and 50 models).



• Climatized electric cabinet with easy access.
• Programmable central lubrication system.




Moving and light control panel with 360° rotation over the entire longitudinal travel.



Control panel with 19" touch screen. Freedom to choose latest CNC controls of the most prestigious manufacturers: HEIDENHAIN, FANUC, SIEMENS.



The tool magazine with automatic tool changer travels with the carriage that makes the longitudinal movement, allowing the tool change at any position on the X axis.



External coolant system around the spindle.




MOVING COLUMN MACHINING CENTERS

ZVH MODELS_ MAIN CONFIGURATION OPTIONS



Non stop machining option that includes a central division wall, independent blocking of front doors, and pendulum cycle work area management software.



Integrated rotary tables covering the Y axis, up to ø1500 mm swing, for turning and/or 5 axis machining operations.



Bolt on rotary tables to be used either in horizontal or vertical axis for up to 5 axis continuous machining operations.



Integration of different clamping systems on the fixed table, such as ZERO points, vacuum systems etc.



Pick up stations integrated in the machine to hold special tools, angular heads etc.



Specific solutions for customers that need to manage a high number of tools: fixed magazines, rack type configurations etc.



Tool magazines to load special tools and large angle heads which can be operated by robot.




Grinding capability with different cycles depending on the machine model (Multiprocess / Extreme).

Another optional items

- Coolant through spindle.
- Tool measuring and touch systems.
- Steam and mist aspiration system.
- Air and water guns.
- "Comfort" pack: Sliding access stairway along the longitudinal travel with supports for air and water guns.
- "Illumination" pack: LED lights with acoustic signal indicating the state of the machine, integrated into the sides.
- Lights with acoustic signal indicating the machine status.
- Camera settings and display mode.
- Control with touch screen up to 24".

ZVH MODELS_ BIG DIAMETER ROTARY TABLES

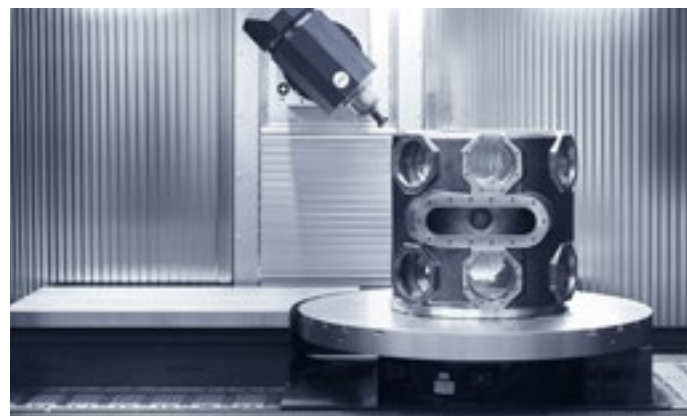

All the advantages of the moving column design adapted to bigger diameters and heavier loads.

ZVH D_ SWING Ø INCREASES

SK 50

- ZVH 60: ø1500 to ø2200 mm
- ZVH 58: ø1400 to ø2000 mm
- ZVH 55: ø1200 to ø1600 mm

SK 40

- ZVH 48: ø1300 to ø2000 mm
- ZVH 45: ø1100 to ø1600 mm



MANUFACTURING TECHNOLOGY


ZVH MULTIPROCESS_ MAIN CONFIGURATION OPTIONS



C axis integrated turning & milling rotary tables. Wide range of turning speeds available.



Customized working areas: Big diameter C axis turning & milling rotary tables for big parts, that can be integrated in the fixed table, or replace it.



Customized working areas: IBARMIA adapts the working area to allow the multiprocess machining of a wide range of parts (big, small, special parts...).



Customized working areas: Servo driven tailstocks for horizontal multiprocess machining.



Horizontal multiprocess machining by chucks integrated in the machine.



Automatic change of long boring bar up to 4 meters long.



Long boring bars for internal diameter turning operations with high rigidity and stability.



Advanced gear machining functions (skiving-hobbing) valid for straight and helicoidal gears.

ZVH MULTIPROCESS_ TURNING SPINDLES




C axis vertical turning tables

- Table ø from 525 to 1200 mm (ø2200 mm in case of ZVH D).
- Max load from 600 to 6000 kg.
- Max speed from 500 to 800 rpm.
- Max power from 34 to 83 kW.
- Max torque from 324 to 4000 Nm.

A axis horizontal turning chucks

- Chuck ø from 180 to 380 mm.
- Max load from 250 to 1500 kg.
- Max speed from 1800 to 3000 rpm.
- Max power from 24 to 78 kW.
- Max torque from 100 to 1400 Nm.

IBARMIA ECO DESIGN

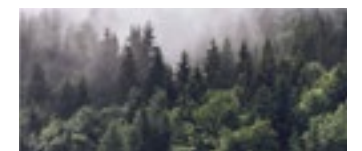

Machines designed considering the environmental impact during all their useful life cycle.



ZVH MULTIPROCESS

PROBABLY, THE MOST FLEXIBLE MACHINE IN THE MARKET


Integrate vertical and/or horizontal turning capacity into a ZVH 5 axis model, combining the high dynamics tilting head with the wide range turning plates available.

1_ A axis turning & milling chucks up to $\varnothing 630$ mm and 2000 rpm.

2_ B axis torque motor continuous tilting head for milling operations. Up to 84 kW / 12.000 rpm.

3_ Two working areas. "Non stop machining" pendulum system.

4_ C axis turning & milling tables. Swings up to $\varnothing 1500$ mm. Up to 6000 kg / 800 rpm.

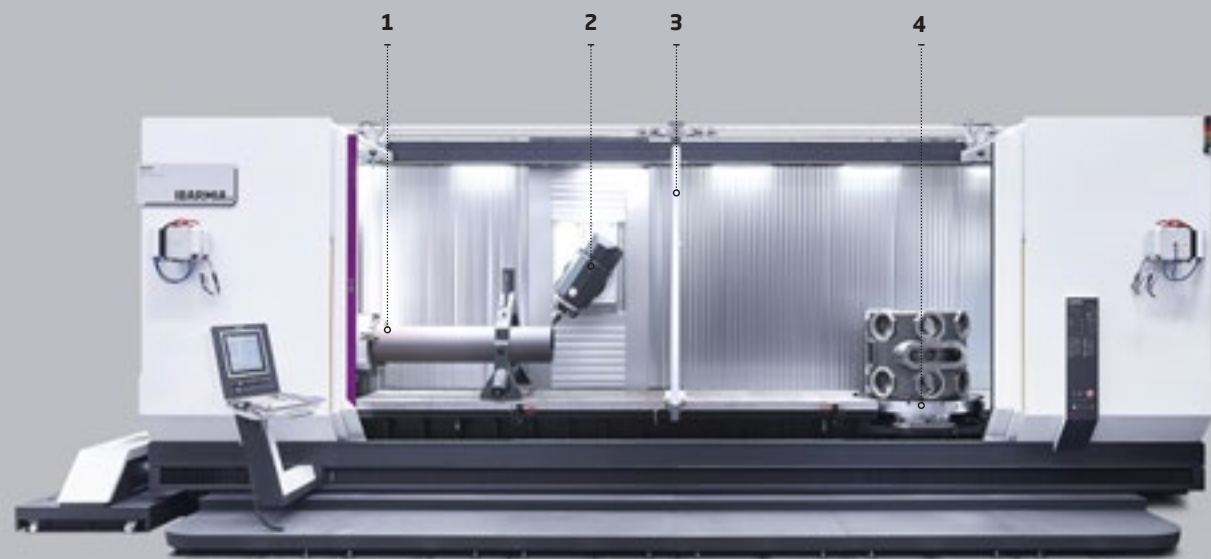

The "total" machining center

Combine axes and processes integrating 5-axis milling, turning and grinding capabilities, with the most advanced gear machining manufacturing technologies in the same machine.



ZVH MULTIPROCESS



MOVING COLUMN MACHINING CENTERS

ZVH MULTIPROCESS_ SAMPLE APPLICATIONS



Nautical engine component



Automobile wheel



Aerospace compressor housing



Engine housing



Toothed shaft



Crankshaft



Pipe line support



Aeronautical component



Landing gear main adapter



MACHINERY



AUTOMOTIVE



AEROSPACE



YELLOW GOODS




OIL & GAS


Z SERIES
LARGE SELECTION
OF ELECTROSPINDLES*

SK 50 BODY SIZES

1_ STANDARD
Power and dynamics_
Up to 12.000 rpm.
74/84 kW (S1/S6).
300/452 Nm (S1/S6)

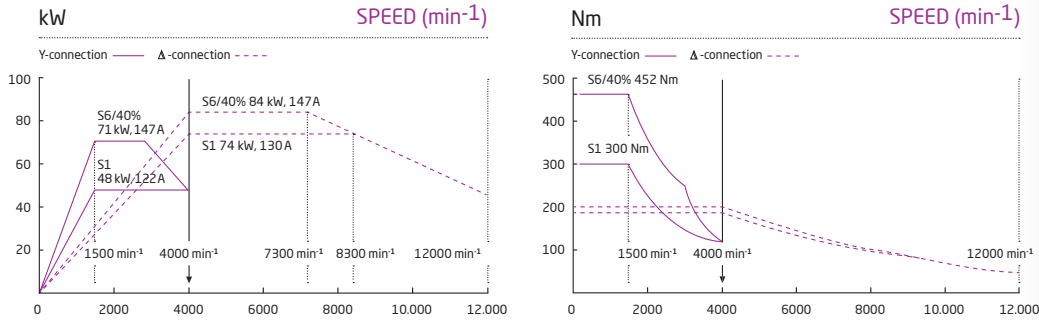


2_ OPTIONAL
High torque for the hardest
materials_
Up to 7000 rpm.
52/73 kW (S1/S6).
500/700 Nm (S1/S6)

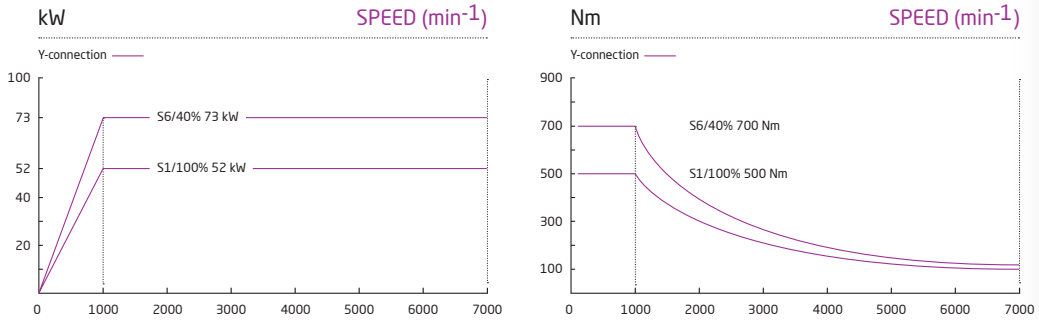


SK 40 BODY SIZES

1_ STANDARD
Dynamics and high revolutions_
Up to 12.000 rpm.
(Option 15.000 rpm)
30/50 kW (S1/S6).
130/200 Nm (S1/S6)

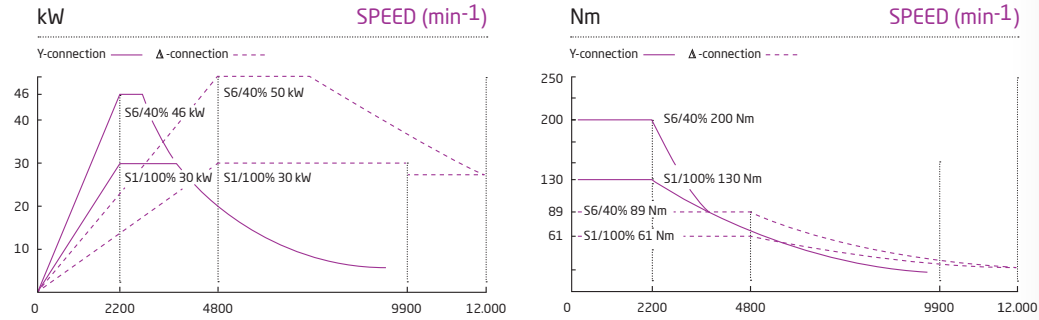

2_ OPTIONAL
Higher speed and dynamics_
Up to 20.000 rpm.
25/40 kW (S1/S6).
87/135 Nm (S1/S6)

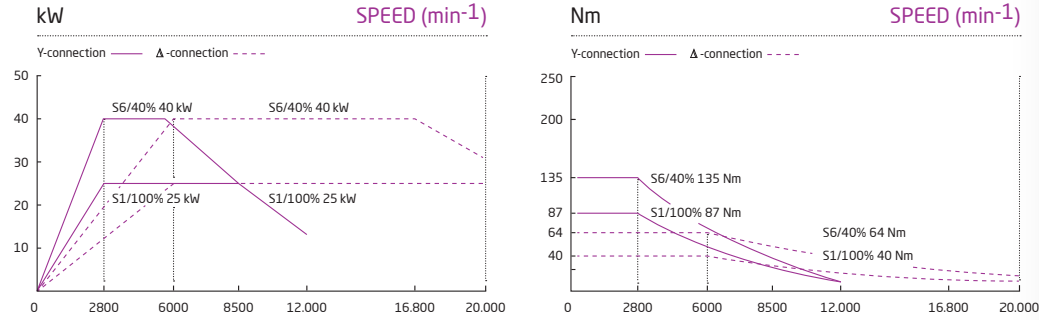

*More spindles on request

ZVH MULTIPROCESS
TECHNICAL DATA

TRAVELS

-X axis travel (length)
-Y axis travel (cross)
-Z axis travel (vertical) (*optional)
-B axis head tilting range
-C axis rotary table maximum swing diameter
-Piece maximum height
-Distance spindle nose-table. Head in V position
-Distance spindle nose-table. Head in H position

SK 50 BODY SIZES				SK 40 BODY SIZES		
ZVH 60	ZVH 58	ZVH 55	ZVH 50	ZVH 48	ZVH 45	ZVH 40
1600 - 12.000 mm						
1100 mm	1000 mm	800 mm	600 mm	1000 mm	800 mm	600 mm
1100 mm (1300*)	1100 mm			900 mm		
+/- 105°						
ø 1500 mm	ø 1400 mm	ø 1200 mm	ø 1000 mm	ø 1300 mm	ø 1100 mm	ø 900 mm
1100 mm				900 mm		
0---1100 mm				0---900 mm		
375---1475 mm				360---1260 mm		

WORKING AREA

-Fixed table dimensions
-Maximum table load capacity
-Number of "T" slots
-"T" slots size
-Distance between "T" slots
-Fixed table height
-C axis turning tables - A axis turning chucks

L1600-2200: X +400 mm; ≥ L3000: X+600 mm & Y +50 mm				
2000 Kg/m²			1500 Kg/m²	
9	7	5	7	5
18 H7 mm				
125 mm				
1075 mm			1050 mm	
Various models available (see on pages 06-07)				

TILTING HEAD

-Turning torque
-Position clamping force

800 Nm	782 Nm
6000 Nm	

MAIN SPINDLE

-Tool holder
-Maximum speed
-Maximum power
-Maximum torque (Nm)

Standard: HSK A-100 - Option: Capto C8	Standard: HSK A-63 - Option: Capto C6
Standard: 12.000 rpm - Option: 7000 rpm	Standard: 12.000 rpm - Option: 20.000 rpm
Standard: 84 kW - Option: 75 kW	Standard: 50 kW - Option: 40 kW
Standard: 452 Nm - Option: 700 Nm	Standard: 200 Nm - Option: 135 Nm

FEED

-Feed thrust X-Y-Z 100%
-Rapid feed for positioning X-Y-Z
-Maximum working feed X-Y-Z
-Rapid feed for positioning in B axis

X: 15.021 N / Y: 12.154 N / Z: 10.649 N	X: 11.992 N / Y: 8521 N / Z: 7669 N
45 m/min	45-48-48 m/min
30 m/min	
50 rpm	

ACCURACY VDI / DGQ3441

-Positioning Tp X-Y-Z (1000 mm)
-Repeatability
-Measuring system on B axis
-Positioning accuracy B axis
-Positioning accuracy C axis

10 µm
5 µm
Rotary scale
+/-5 s
+/-4 s

CAPACITIES

-Milling capacity in steel St 60
-Drilling capacity in steel St 60
-Tapping capacity in steel St 60

1100 cm³/min	900 cm³/min
ø 70 mm	ø 50 mm
M 45 mm	M 33 mm

TOOL MAGAZINE

-Number of tools
-Maximum tool length
-Maximum tool weight
-Maximum tool diameter with full magazine
-Maximum tool diameter with free spaces
-Tool changing time
-Chip to chip time

30. Optional: 40, 60, 80 and more available on request.	24. Optional: 40, 60, 80 and more available on request.
400 mm	350 mm
20 kg	10 kg
ø 125 mm (ø 100 mm with 60-80 ATC)	ø 90 mm (ø 80 mm with 60-80 ATC)
200 mm	150 mm
10 s	8 s
12 s	10 s

CNC CONTROL

-Available digital controls


Fanuc / Heidenhain / Siemens

IBARMIA.



YOUR MACHINE TOOL POINT

Diego Umantsoro, 5 - Apdo 35
20720 Azkoitia (Gipuzkoa) Spain. T +34 943 857 000
ibarmia@ibarmia.com

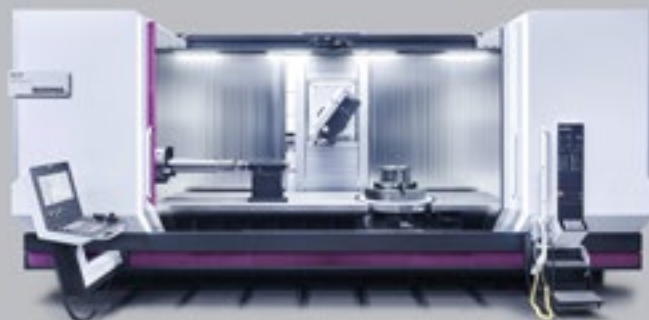

www.ibarmia.com